


Model TU-SUPMKT Data Sheet

This product is a manual mechanical door. To enter, you need to manually push the door open. After releasing it, the swing arm will automatically bounce back to the closed state. The door cannot be opened by pushing it in the opposite direction, but it can be pulled apart, otherwise the fire protection acceptance will not pass.

It is mainly used to indicate and control the entry and exit routes of guests. It belongs to a series of one-way access doors to prevent customers from entering in an incorrect way. This product has a small footprint, simple installation, beautiful appearance, and the rebound speed can be adjusted.

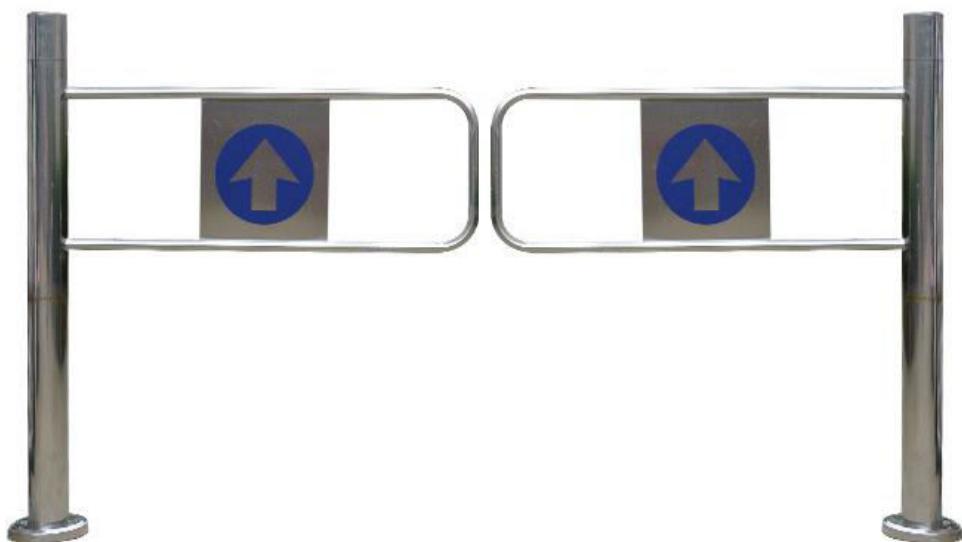


Install the chassis

Thicken the chassis design, fix it with the ground with expansion screws, put down the cover after fixing

The swing door and column are firm and beautiful, durable, not easy to break, and not hurt your hands.



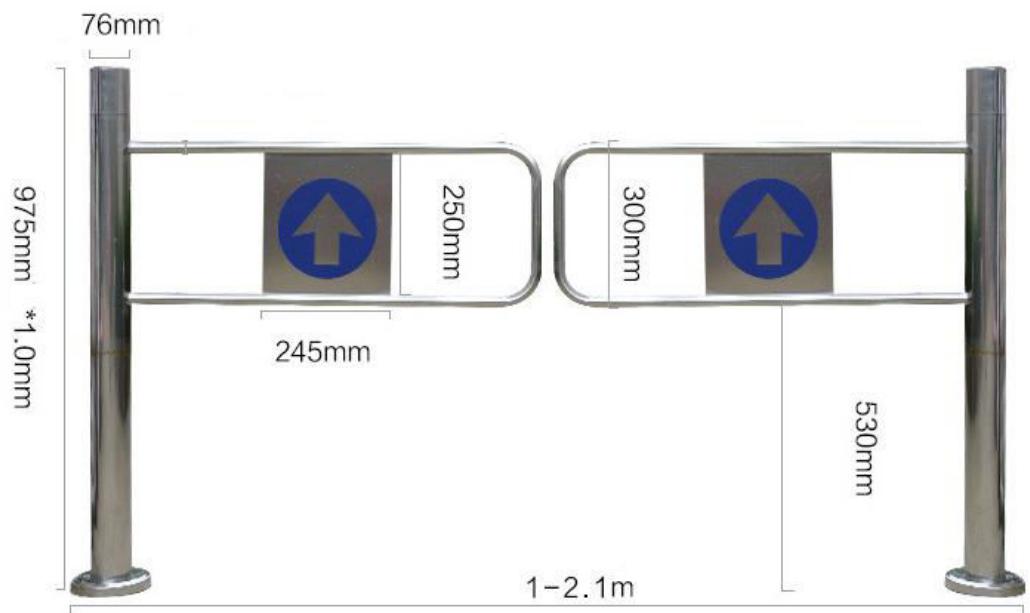

Product size	Type	Material	Product volume	G.W.
1500*76MM	Vertical	SUS 304	100* 200* 107cm	22kg